

INSTALLATION INSTRUCTIONS FOR RECESSED EDGE-LIT LED EXIT SIGN—AC ONLY

READ AND FOLLOW ALL SAFETY INSTRUCTIONS

IMPORTANT SAFEGUARDS: When using electrical equipment, always adhere to basic safety precautions including the following:

1. Do not use outdoors.
2. Do not let power supply cords touch hot surfaces.
3. Use caution when servicing batteries. Battery acid can cause burns to skin and eyes. If acid is spilled on skin or eyes, flush with fresh water and contact a physician immediately.
4. Do not mount near gas or electric heaters.
5. Equipment should be mounted in locations and at heights where it will not be subject to tampering by unauthorized personnel.
6. The use of accessory equipment not recommended by the manufacturer may cause an unsafe condition.
7. Any modification or use of non-original components will void the warranty and product liability.
8. Do not use this equipment for other than its intended use.
9. Servicing of this equipment should be performed by qualified service personnel only.

SAVE THESE INSTRUCTIONS!

PLEASE NOTE

This unit is for mounting in suspended type ceilings and other types of ceilings where access to above is available after installation and building finish is complete. Do not install this unit in finished drywall or other types of ceilings where there will be no access from above or below to the plenum area.

STEP ONE: Preparing the CEILING to ACCEPT the fixture and placing fixture in the ceiling

1. Determine the proper location for where the sign is going to be mounted. Remove cardboard template from the box and place against the ceiling tile or area of the ceiling where exit light is going to be installed and trace a line around the template (Figure A). This will be the area that is going to be cut out. You may want to do the cutting on the ground if possible.
2. Cut the rectangular hole out of the ceiling area (Figure B).
3. Remove trim plate and place entire unit down through the cut out hole (Figure C).
4. Seat the bar hangers in the T-Bar grid or mount them to the wood truss to secure the fixture in place (Figure D).
5. Make adjustments to the bar hanger holder bracket (Figure F) to bring the fixture into proper ceiling height alignment to accept the finish trim plate. This height is determined by making sure the finish plate screw holes are just slightly above the finished ceiling (Figure E). To make the adjustments, simply loosen the screws on the bar hanger holder bracket and adjust unit up or down to the proper position and then re-tighten the screws (Figure F).

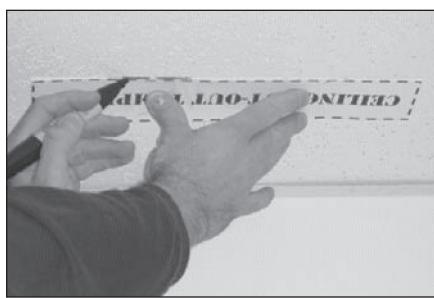


Figure A

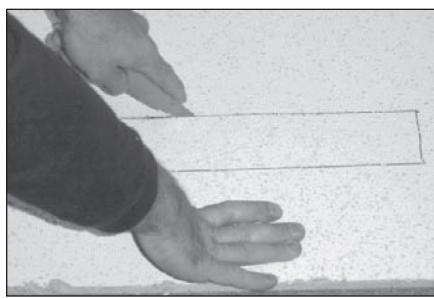


Figure B



Figure C

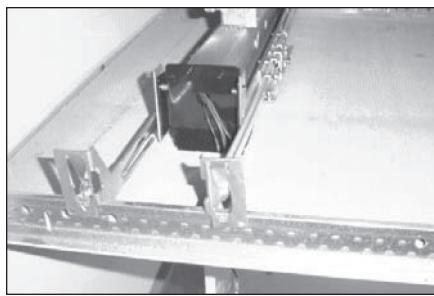


Figure D



Figure E

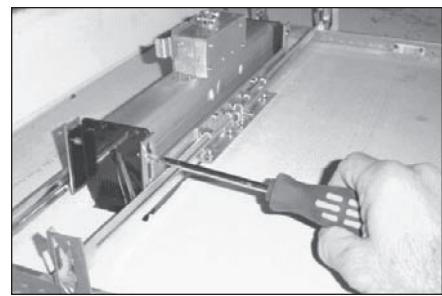


Figure F

INSTALLATION INSTRUCTIONS FOR RECESSED EDGE-LIT LED EXIT SIGN—AC ONLY

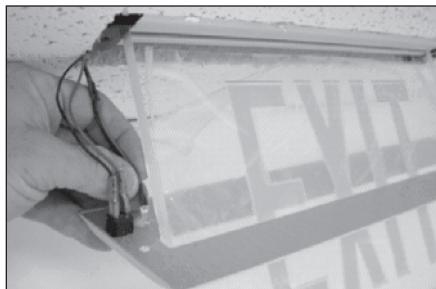


Figure G

6. Slide the trim plate through the EXIT PANEL and remount the LED indicator (Figure G). Screw the plate to the unit.
7. Remove the protective film from the exit panel (Figure H).

STEP TWO: Making the electrical connections

1. Remove the junction box cover on the top of the unit (Figure J).
2. Remove knock out and install conduit connector in the J-Box (Figure K).
3. Make the proper electrical AC connection by bringing the supply wires into the J-Box and connecting them to the proper wires.
(120 Volt: use BLACK for HOT and WHITE for COMMON)
(277 Volt: use RED for HOT and WHITE for COMMON)
4. Replace J-Box cover (Figure J).

ELECTRICAL CONNECTIONS: WARNING

1. MAKE SURE THAT POWER IS OFF BEFORE MAKING ANY ELECTRICAL CONNECTIONS!
2. UNUSED WIRES MUST BE CAPPED USING ENCLOSED WIRE NUTS.

WHITE: Return for 120VAC or 277VAC wiring

BLACK: Hot lead for 120VAC wiring

RED/ORANGE: Hot lead for 277VAC wiring

GREEN: Equipment ground

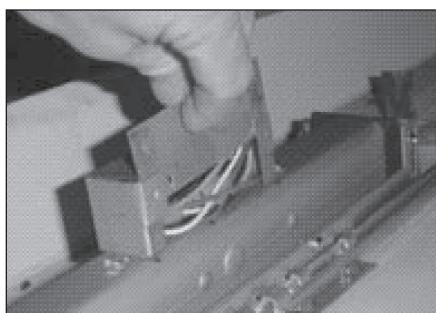


Figure J

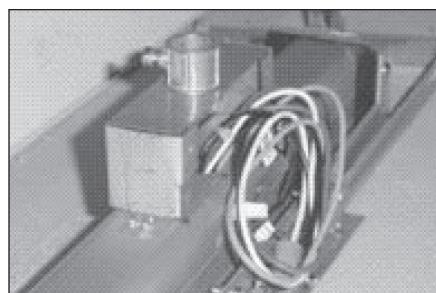


Figure K